

LifeSaver™ Anti-Ligature Life Safety Lock Series

Ergonomic Knobs & Levers



Push/Pull Paddlesets



5-Point
Ligature-Resistant
D-Lig Slide



Select Healthcare References:

- Connecticut Mental Health Center - New Haven, CT
- College Hospital - Cerritos, CA
- John Peter Smith Hospital - Fort Worth, TX
- Glendale Adventist Medical - Center Glandale, CA
- Rusk State Hospital - Rusk, TX
- Houston Behavioral Healthcare - Center Houston, TX
- Coney Island Hospital - Brooklyn, NY
- Jacobi Medical Center - Bronx, NY
- Bellevue Hospital Center - New York, NY
- Woodhull Medical and Mental Health Center - Brooklyn, NY
- Dallas Behavioral Healthcare Hospital - DeSoto, TX
- Allegiance Specialty Hospital - Kilgore, TX
- Elmhurst Hospital Center - Elmhurst, NY
- Kindred Hospital New Orleans - New Orleans, LA
- North Central Bronx Hospital - Bronx, NY
- Bournewood Hospital - Chestnut Hill, MA
- St. Josephs Healthcare London - London, ON, CA
- St. Josephs Healthcare Hamilton - Hamilton, ON, CA
- Santa Clara Valley Medical Center - Santa Clara, CA
- St. Thomas Elgin General Hospital - St. Thomas, ON, CA
- Waypoint Centre for Mental Healthcare - Penetanguishene, ON, CA



MARKSUSA



Grade 1 Series 195BH D-Lig Slide Behavioral Health Cylindrical Locksets



SERIES 195BH				
MARKS #		DESCRIPTION	ANSI #	FINISH
COMM. CYL.	ACCEPTS IC CORE CYL.*			
N	—	PASSAGE	F75	32D
L	—	PRIVACY	F76	
B	RB	ENTRY	F82A	
S	RS	CLASSROOM	F84	
F	RF	STOREROOM	F86	
DW	RDW	INSTITUTION	F87	
DB	RDB	CLASSROOM INTRUDER	F110	
DO	—	DUMMY TRIM OUTSIDE	—	
DT	—	FULL DUMMY TRIM	—	
NB	—	COMM. PASSAGE	F111	
FB	RFB	COMM. STOREROOM	F112	
SB	RSB	COMM. CLASSROOM	F113	
FEL	RFEL	ELECTRICALLY LOCKED		
FEU	RFEU	ELECTRICALLY UNLOCKED		



STANDARD FEATURES:

- **Rating:** ANSI A156.2 Grade 1, UL Listed 3Hr Fire Rating
- 5- Point Ligature Resistant slide Trim
- **Backset:** 2 3/4" Standard, 2 3/8", 3 3/4" and 5" available
- **Latch:** #1834, stainless Steel Nose
- **Ergonomic solid cast Stainless Steel Slide,** Slides down freely in the locked or unlocked position
- **Escutcheon Plate solid cast Stainless Steel** thru bolted for strength and easy installation
- Meets **BHMA 156.34 Anti Ligature Trim Standard**
- Tamper Resistant mounting screws
- **Strike:** #1135, 4 7/8" ASA curved lip Strike
- **Door Thickness:** 1 3/4", consult factory for thicker doors
- **Cylinder:** Conventional Key n Knob Cylinder, Marks "C" Keyway, 6 pin w/2 keys – Available in IC and all OEM cylinder preps
- Marks Hi-Security Cylinder available
- **Marks Stainless Steel Retractor** - Long life 3X the BHMA Grade 1 cycle Standard
- Antimicrobial Finish available – Code AM
- **Marks Lifetime Mechanical Warranty**
- Available in Most BHMA ANSI Functions

Standard & HI-SECURITY™ IC Core Models:
 Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®.
IC Core Tailpieces ARE Included.

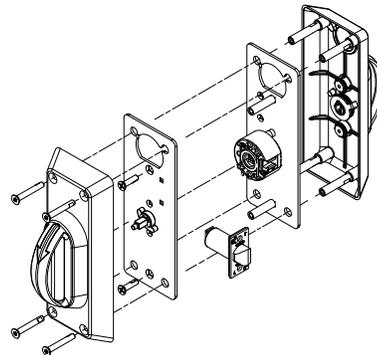

Grade 1 Series 5BH D-Lig Slide Behavioral Health Mortise Locksets

SERIES 5BH			
MARKS #	FUNCTION*	ANSI #	FINISH
KEYED SINGLE CYLINDER, NO DEADBOLT			
DW	VESTIBULE		32D
EW	STOREROOM	F07	
J	CLASSROOM	F05	
GL	INSTIT. PRIVACY	F26	
EL	ELECTRICALLY LOCKED		
EU	ELECTRICALLY UNLOCKED		
KEYED DOUBLE CYLINDER, NO DEADBOLT			
GC	INTRUDER LATCHBOLT	F32	32D
GG	CLASSROOM SECURITY		
WW	INSTITUTIONAL	F30	
KEYLESS			
N	PASSAGE	F01	32D
LJ	PRIVACY	F22	
DUMMY TRIM			
DI	DUMMY TRIM INSIDE		32D
DO	DUMMY TRIM OUTSIDE		
DT	FULLY DUMMY		



*Consult Factory for more available functions

Standard & HI-SECURITY™ IC Core Models:

Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®. **IC Core Tailpieces ARE Included.**

STANDARD FEATURES:

- **Rating:** ANSI A156.13 Grade 1, UL Listed 3Hr Fire Rating
- 5- Point Ligature Resistant slide Trim
- **Backset:** 2 3/4" Standard, 2 1/2" Consult Factory
- **Latch:** #1834, stainless Steel Nose
- **Ergonomic solid cast Stainless Steel Slide,** Slides down freely in the locked or unlocked position
- **Escutcheon Plate solid cast Stainless Steel** thru bolted for strength and easy installation
- Meets **BHMA 156.34 Anti Ligature Trim Standard**
- Tamper Resistant mounting screws
- Ligature Resistant ADA Thumbturn available where applicable
- **Strike:** #1135, 4 7/8" ASA curved lip Strike
- **Door Thickness:** 1 3/4", consult factory for thicker doors
- **Cylinder:** Conventional Key n Knob Cylinder, Marks "C" Keyway, 6 pin w/2 keys – Available in IC and all OEM cylinder preps
- Marks Hi-Security Cylinder available
- **Marks Stainless Steel Retractor** - Long life 3X the BHMA Grade 1 cycle Standard
- Antimicrobial Finish available – Code AM
- **Marks Lifetime Mechanical Warranty**
- Available in Most BHMA ANSI Functions

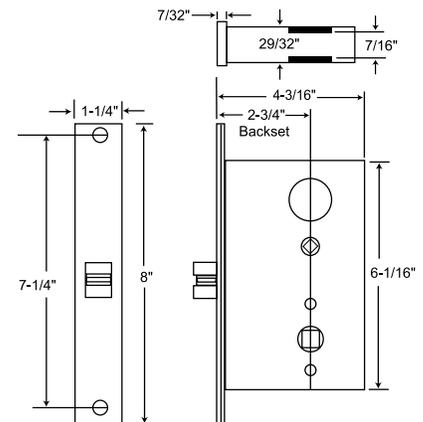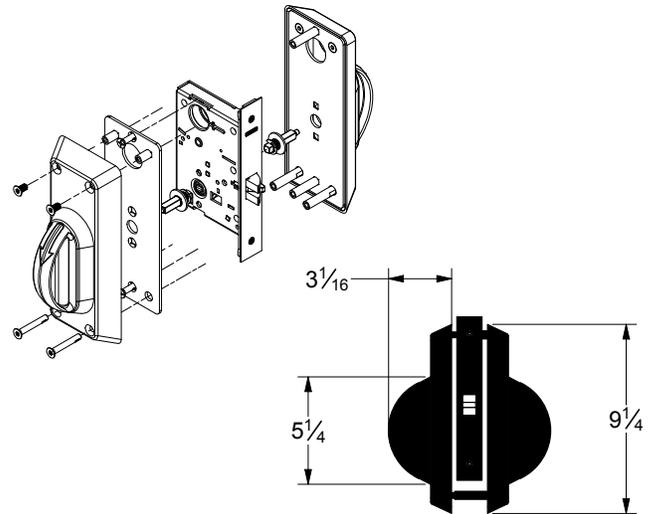

Series 195SS Institutional Series Life Safety Cylindrical Locksets – Levers

SERIES 1SS19				
MARKS #		DESCRIPTION	ANSI #	FINISH
COMM. CYL.	ACCEPTS IC CORE CYL.*			
N	—	PASSAGE	F75	32D
L	—	PRIVACY	F76	
LK	—	PRIVACY	F76 MOD.	
P	—	PATIO	F77	
DC	RDC	COMMUNICATING	F80	
B	RB	ENTRY	F82A	
AQ	—	EXIT	F83	
S	RS	CLASSROOM	F84	
F	RF	STOREROOM	F86	
DW	RDW	INSTITUTION	F87	
DA	RDA	VESTIBULE	F88	
FQ	—	EXIT	F89	
T	RT	CORRIDOR	F90	
TK	RTK	HOSPITAL/PRIV.	F90 MOD.	
GB	RGB	STORE DOOR	F91	
BS	RBS	SVC. STATION LOCK	F92	
H	—	HOTEL	F93	
DO	—	DUMMY TRIM OUTSIDE	—	
DT	—	FULL DUMMY TRIM	—	
NB	—	COMM. PASSAGE	F111	
FB	RFB	COMM. STOREROOM	F112	
SB	RSB	COMM. CLASSROOM	F113	
FEL	RFEL	ELECTRICALLY LOCKED		
FEU	RFEU	ELECTRICALLY UNLOCKED		

PACKED 6 PER CASE

Standard & HI-SECURITY™ IC Core Models:



Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®.

IC Core Tailpieces ARE Included. When ordering IC Core Cylinder add the prefix "R" to the part number ie: 5SS55RA/32D



STANDARD FEATURES:

- ANSI-A156.2 Grade 1, UL listed 3 Hr. Fire Rating
- Backset: 2-3/4" Standard, 2-3/8", 3-3/4", 5" Available
- Latch #1834, stainless steel nose
- **Levers: Solid cast stainless steel. Levers Rotate up & down freely in locked or unlocked position**
- Levers recessed into solid stainless steel roses eliminating any open gap
- Roses: Thru-bolted, spring loaded, #10 thru-bolts
- Strike: #1135, 4-7/8" ASA curved lip strike
- Door thickness: 1-3/4" +/- 1/16"
- Cylinder: MARKS "C" keyway, 6 pin w/ 2 keys
- Stainless steel retractor

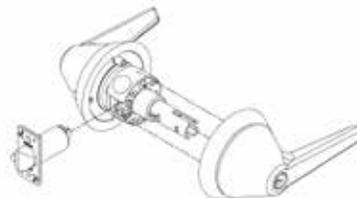

Series 5SS19 Institutional Series Life Safety Mortise Locksets – Levers

SERIES 5 & 5SS19			
MARKS # Comm Cyl.	FUNCTION	ANSI #	FINISH
KEYED SINGLE CYLINDER, NO DEADBOLT			
D	OFFICE VEST.		32D
DW	VESTIBULE		
E	OFFICE	F04	
EW	STOREROOM	F07	
J	CLASSROOM	F05	
JM, JR	HOSPITAL	F06	
GL	INSTITUTIONAL PRIVACY	F26	
EL	ELECTRICALLY LOCKED		
EU	ELECTRICALLY UNLOCKED		
KEYED SINGLE CYLINDER, WITH DEADBOLT			
A	ENTRANCE	F08, F10	32D
B	ENTRANCE	F21	
F	DORMITORY	F12	
FS	DORMITORY		
FW	DORMITORY	F13	
KEYED DOUBLE CYLINDER, NO DEADBOLT			
G	APARTMENT	F09	32D
GC	INTRUDER LATCHBOLT	F32	
GG	CLASSROOM SECURITY		
GR	CLASSROOM SECURITY w/HOLDBACK		
WW	INSTITUTIONAL	F30	
KEYED DOUBLE CYLINDER, WITH DEADBOLT			
AC	ENTRANCE	F35	32D
C	STOREROOM	F14	
FC	INTRUDER DEADBOLT	F34	
FA	DORMITORY	F11	
FX	DORMITORY	F33	
KEYLESS			
N	PASSAGE	F01	32D
L	BATHROOM	F02	
LF	PRIVACY	F19	
LJ	PRIVACY	F22	
EX	EXIT	F31	
DUMMY TRIM			
DI	DUMMY TRIM INSIDE		32D
DO	DUMMY TRIM OUTSIDE		
DT	FULLY DUMMY		


Standard & HI-SECURITY™ IC Core Models:

Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®.

IC Core Tailpieces ARE Included. When ordering IC Core Cylinder add the prefix "R" to the part number ie: 5SS55RA/32D

Function "LJ" F22:

ANSI F22 Latch by lever either side except when outside lever is locked by inside turnpiece. Turning inside lever or closing door unlocks outside lever. To unlock from outside, remove emergency button, insert emergency key in access hole and turn. Optional coin key assembly available.



STANDARD FEATURES:

Life Test: 1,500,000 cycles minimum.

ANSI Test: Meets or exceeds all operational and security tests of ANSI specifications A156.13-2005 for series 5000, Grade 1.

TRIM SPECIFICATIONS:

Exterior & Interior Trim:

- Solid stainless steel interior and exterior tapered knobs or levers recessed into thru-bolted roses.
- Safety knobs with recessed grip and finger indents (*Patent #D587556*). Safety lever for handicapped access on clutch operated Mortise lock.
- Ergonomically designed grooved turn knob for deadbolt functions.

Cylinder: Solid stainless steel cylinders with solid stainless steel security collars; Optional HI-SECURITY™ cylinders available

Strike: 4-7/8" curved lip stainless steel w/tamperproof screws

Door Thickness: 1-3/4" standard; Extended range available

Door Prep: ANSI A115.1 lock face cutout, with 2-1/8" through hole for knob/rose assembly

Lock Specifications: 5 Series (2-3/4" Backset) 55 Series (2-1/2" Backset)

Lock Front: Adjustable bevel steel backplate 1-1/4" x 8" x 7/64" thick, Cover plate 1/16" thick with tamper proof screws

Latch: Solid stainless steel with antifriction latch lever, 3/4" throw (reversible)

Levers: Solid cast stainless steel. **Levers Rotate up & down freely in locked or unlocked position**

Aux. Deadlatch: 1/2" throw, (reversible)

Case: Stamped steel 3/32" thick, zinc dichromate finish

Hubs: Steel, 9/32" on diamond, 5/16" on square w/security separator

Hub Lock Arm: (to lock hub) Steel 1/8" thick

Spindles: Independent spring-loaded spindles



5SS19F/21D Shown


Quick Privacy Access
A9618-1 Shown;
Option Code A25

Series 180SS Institutional Series Life Safety Cylindrical Locksets Deadlatch Locksets & Mortise Deadlocks – Knobs

SERIES 1SS55				
MARKS #		FUNCTION	ANSI #	FINISH
Comm Cyl.	IC Core Cyl.			
KEYED SINGLE CYLINDER, WITH DEADBOLT				
K	RK	CYLINDER x KNOB	E0121	32D
KEYLESS				
N	—	PASSAGE	F75	32D


180SSK Cylindrical Deadlatch Lockset

180SSK/32D Shown

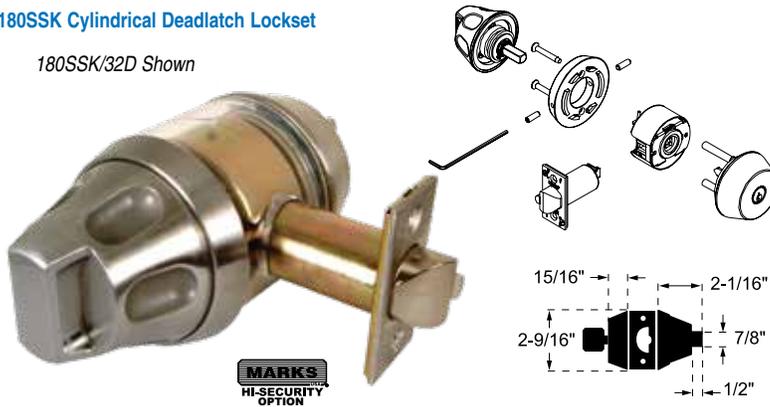

180SSN Cylindrical Lockset

180SSN/32D Shown

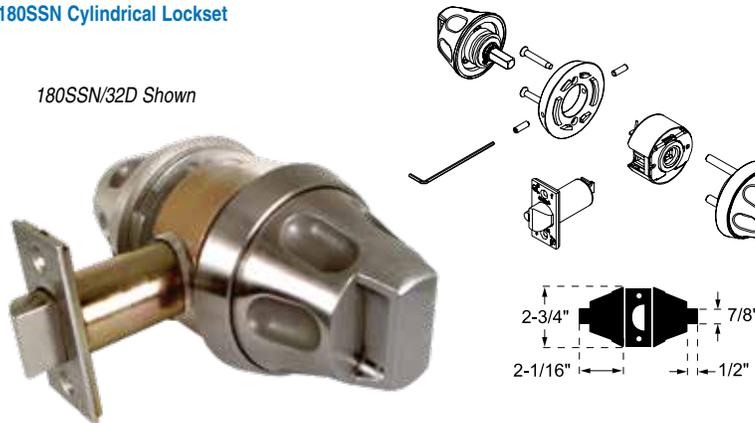

CYLINDRICAL LOCKSETS - STANDARD FEATURES:

Life Test: 1,500,000 cycles minimum.

ANSI Test: Meets or exceeds all operational and security tests of ANSI specifications A156.2-2003 for series 1000, Grade 1.

Fire Test: UL Listed, 3 Hour fire rated. 

Exterior & Interior Trim:

- Solid stainless steel interior and exterior tapered knobs recessed into thru-bolted roses
- Specially designed finger indented safety knobs with recessed grip and ergonomically designed integral grooved turn knob for elderly and handicapped access (*Patent #D587556*)
- Needle bearings ensure smoothness of operation

1SS55K Cylindrical Deadlatch Lockset: ANSI E0121 Cylinder x Knob

Strike: #1136, 2-3/4" "T" strike; #1135 4-7/8" ASA strike optional

Door Prep: ANSI 115.2

Latch: ANSI 156.2, Grade 1, 3 Hour fire rated

Door Thickness: 1-3/4"

Backset: 2-3/4" Backset; 3-3/4" and 5" backsets also available

Latch Face: 1-1/8" x 2-1/4" with tamper proof screws

Cylinder: Solid brass cylinder, 6-pin, "C" keyway; Optional HI-SECURITY™ cylinders available

1SS55N Cylindrical Lockset: ANSI F75 Passage

Strike: #1136, 2-3/4" "T" strike

Door Prep: ANSI 115.2

Latch: ANSI 156.2, Grade 1, 3 Hour fire rated

Backset: 2-3/4" backset standard, 2-3/8" backset optional; 3-3/4" and 5" backsets also available

Latch Face: 1-1/8" x 2-1/4" with tamper proof screws

Latch Throw: 9/16"


Standard & HI-SECURITY™ IC Core Models:

Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®.

IC Core Tailpieces ARE included. When ordering IC Core Cylinder add the prefix "R" to the part number ie: 5SS55RA/32D

SERIES 31SS55				
MARKS #		FUNCTION	ANSI #	FINISH
Comm Cyl.	IC Core Cyl.			
KEYED SINGLE CYLINDER, WITH DEADBOLT				
K	RK	CYLINDER x KNOB	E06071	32D
S	RS	CLASSROOM	E06091	32D

31SS55K/32D Shown

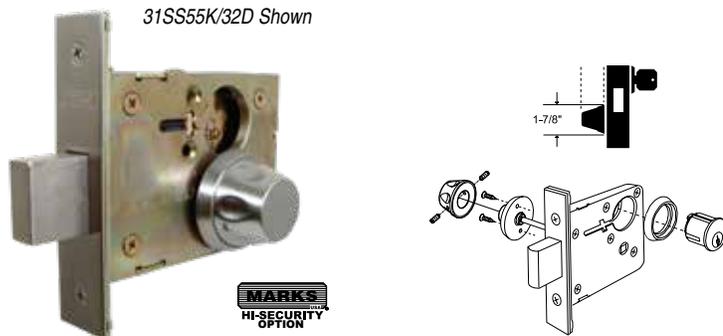

MORTISE DEADLOCK - STANDARD FEATURES:

Life Test: 1,500,000 cycles minimum.

ANSI Test: Meets or exceeds all operational and security tests of ANSI/BHMA Certified A156.5-2001 for series 31, Grade 1.

Fire Test: UL Listed, 3 Hour fire rated.

Trim Specifications:

Interior Trim: Solid stainless steel interior trim including finger indented safety knobs which recess into solid brass through-bolted roses.

Series 31 Deadlock Specifications:

Backset: 2-3/4"

Bolt throw: 1" stainless steel w/hardened roll pins

Case: Stamped Steel

Front: 1-1/16" x 4-5/8" adjustable bevel

Cylinder: Solid brass cylinder, 6-pin, "C" keyway, 2 keys. Optional HI-SECURITY™ cylinders available.

Strike: #4035 Included

Standard & HI-SECURITY™ IC Core Models:

Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®.

IC Core Tailpieces ARE included. When ordering IC Core Cylinder add the prefix "R" to the part number ie: 5SS55RA/32D

Series 5SS55 Institutional Series Life Safety Mortise Locksets – Knobs

MARKS #	FUNCTION	ANSI #	Series 5 & 55 SS55
Comm Cyl.			FINISH
KEYED SINGLE CYLINDER, NO DEADBOLT			
D	OFFICE VEST.		32D
DW	VESTIBULE		
E	OFFICE	F04	
EW	STOREROOM	F07	
J	CLASSROOM	F05	
JM, JR	HOSPITAL	F06	
GL	INSTITUTIONAL PRIVACY	F26	
EL	ELECTRICALLY LOCKED		
EU	ELECTRICALLY UNLOCKED		
KEYED SINGLE CYLINDER, WITH DEADBOLT			
A	ENTRANCE	F08, F10	32D
B	ENTRANCE	F21	
F	DORMITORY	F12	
FS	DORMITORY		
FW	DORMITORY	F13	
KEYED DOUBLE CYLINDER, NO DEADBOLT			
G	APARTMENT	F09	32D
GC	INTRUDER LATCHBOLT	F32	
GG	CLASSROOM SECURITY		
GR	CLASSROOM SECURITY w/HOLDBACK		
WW	INSTITUTIONAL	F30	
KEYED DOUBLE CYLINDER, WITH DEADBOLT			
AC	ENTRANCE	F35	32D
C	STOREROOM	F14	
FC	INTRUDER DEADBOLT	F34	
FA	DORMITORY	F11	
FX	DORMITORY	F33	
KEYLESS			
N	PASSAGE	F01	32D
L	BATHROOM	F02	
LF	PRIVACY	F19	
LJ	PRIVACY	F22	
EX	EXIT	F31	
DUMMY TRIM			
DI	DUMMY TRIM INSIDE		32D
DO	DUMMY TRIM OUTSIDE		
DT	FULLY DUMMY		


Standard & HI-SECURITY™ IC Core Models:

Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®.

IC Core Tailpieces ARE Included. When ordering IC Core Cylinder add the prefix "R" to the part number ie: 5SS55RA/32D

Function "LJ" F22:

ANSI F22 Latch by knob either side except when outside knob is locked by inside turnpiece. Turning inside knob or closing door unlocks outside knob. To unlock from outside, remove emergency button, insert emergency key in access hole and turn. Optional coin key assembly available.



STANDARD FEATURES:

Life Test: 1,500,000 cycles minimum.

ANSI Test: Meets or exceeds all operational and security tests of ANSI specifications A156.13-2005 for series 5000, Grade 1.

TRIM SPECIFICATIONS:

Exterior & Interior Trim:

- Solid stainless steel interior and exterior tapered knobs or levers recessed into thru-bolted roses.
- Safety knobs with recessed grip and finger indents (*Patent #D587556*). Safety lever for handicapped access on clutch operated Mortise lock.
- Ergonomically designed grooved turn knob for deadbolt functions.

Cylinder: Solid stainless steel cylinders with solid stainless steel security collars; Optional HI-SECURITY™ cylinders available

Strike: 4-7/8" curved lip stainless steel w/tamperproof screws

Door Thickness: 1-3/4" standard; Extended range available

Door Prep: ANSI A115.1 lock face cutout, with 2-1/8" through hole for knob/rose assembly

Lock Specifications: **5 Series (2-3/4" Backset)**
55 Series (2-1/2" Backset)

Lock Front: Adjustable bevel steel backplate 1-1/4" x 8" x 7/64" thick, Cover plate 1/16" thick with tamper proof screws

Latch: Solid stainless steel with antifriction latch lever, 3/4" throw (reversible)

Levers: Solid cast stainless steel. **Levers Rotate up & down freely in locked or unlocked position**


Aux. Deadlatch: 1/2" throw, (reversible)

Case: Stamped steel 3/32" thick, zinc dichromate finish

Hubs: Steel, 9/32" on diamond, 5/16" on square w/security separator

Hub Lock Arm: (to lock hub) Steel 1/8" thick


Spindles: Independent spring-loaded spindles



Quick Privacy Access
A9618-1 Shown;
Option Code A25



5SS55N/32D Shown

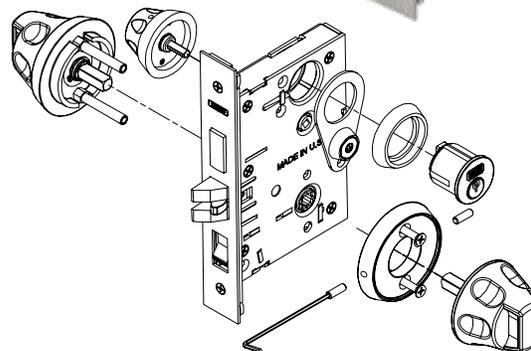

Series PD Cylindrical & Mortise Hospital Push/Pull Paddlesets

SERIES 1PD			
MARKS #	FUNCTION	ANSI #	FINISH
KEYLESS			
N	PASSAGE	F75	32D
SERIES 5 & 55PD			
MARKS #	FUNCTION	ANSI #	FINISH
KEYED SINGLE CYLINDER, NO DEADBOLT			
D	OFFICE VEST.		32D
DW	VESTIBULE		
E	OFFICE	F04	
EW	STOREROOM	F07	
J	CLASSROOM	F05	
JM, JR	HOSPITAL	F06	
GL	INSTITUTIONAL PRIVACY	F26	
EL	ELECTRICALLY LOCKED		
EU	ELECTRICALLY UNLOCKED		
KEYED SINGLE CYLINDER, WITH DEADBOLT			
A	ENTRANCE	F08, F10	32D
B	ENTRANCE	F21	
F	DORMITORY	F12	
FS	DORMITORY		
FW	DORMITORY	F13	
FD	APARTMENT	F20	
H	HOTEL	F15	
LH	SPECIAL PRIVACY		
KEYED DOUBLE CYLINDER, NO DEADBOLT			
G	APARTMENT	F09	32D
GC	INTRUDER LATCHBOLT	F32	
GG	CLASSROOM SECURITY		
GR	CLASSROOM SECURITY w/HOLDBACK		
WW	INSTITUTIONAL	F30	
KEYED DOUBLE CYLINDER, WITH DEADBOLT			
AC	ENTRANCE	F35	32D
C	STOREROOM	F14	
FC	INTRUDER DEADBOLT	F34	
FA	DORMITORY	F11	
FX	DORMITORY	F33	
KEYLESS			
N	PASSAGE	F01	32D
L	BATHROOM	F02	
LF	PRIVACY	F19	
LJ	PRIVACY	F22	
EX	EXIT	F31	

Common pin tumbler cylinders may be compromised by picking, drilling or key bumping. For applications where a greater security level is required, we suggest using drill/pick resistant cylinders with multiple pin planes such as those with sidebars. **Marks USA HI-SECURITY™ Cylinders** are constructed with sidebars and are drill, pick and bump resistant.

STANDARD FEATURES:


- Door thickness: 1-3/4"
- ANSI-A156.2 Grade 1
- Lead lining and engraving available
- ADA Compliant
- Non-Handed
- Government Standard #161
- Functional, modern design with variable mounting positions
- Short throw angle allows for easy push/pull action to open doors even when hands are not free
- Standard 32D finish; consult factory for available finishes
- Universal assemblies can be push/pull vertical up or down
- Easily reversible configuration for push or pull styles

Cylindrical ANSI A156.2, Grade 1

- Backset: 2-3/4" standard, 2-3/8" & 5" optional
- Strike: #1136, 2-3/4" "T" strike; 4-7/8" ASA strike optional

Mortise ANSI A156.13, Grade 1

- Backset: 5 Series 2-3/4"; 55 Series 2-1/2"
- Strike: #9035, 4-7/8" "T", ASA curved lip strike

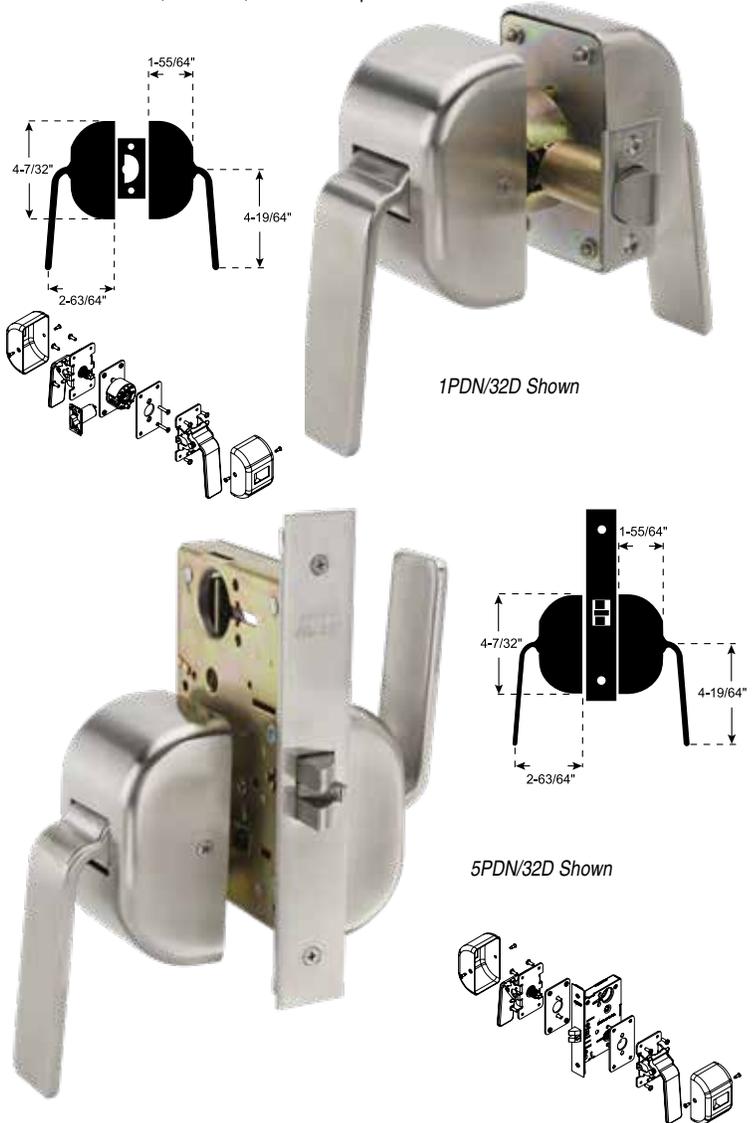

1PDN/32D Shown

5PDN/32D Shown